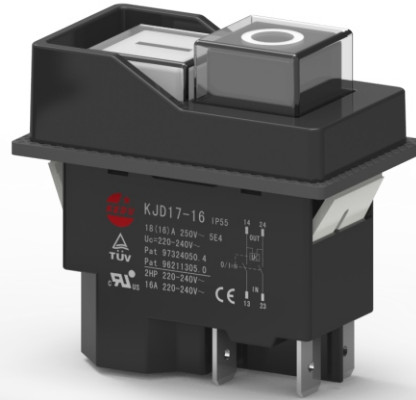




电磁开关

KJD17 KJD17-16 Electromagnetic Switch



Description 描述

These switches have the following functions that derived from power-off and under voltage protection:

1. Double pole cut off;
 2. Brake function with one pole cut off;
 3. These two versions can be combined with overload protection switch to achieve under voltage and overload protection.
- The advantage of our patented technology is high current with small size.

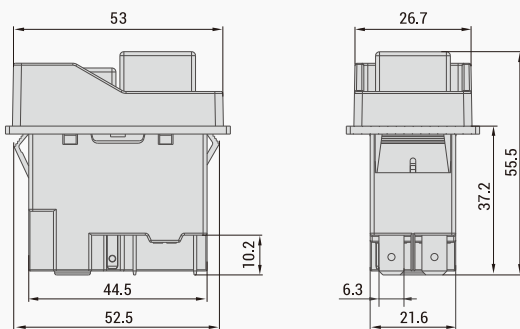
该系列开关在停电和欠电压保护功能的基础上可派生出以下几种功能：

- 1、两极全断开
- 2、一极断开带刹车功能
- 3、以上两种均可与热保护开关组合使用，即同时具备欠压保护，过载保护等。

该专利技术体形小，电流大。


Reference Dimension 参考尺寸

KJD17F KJD17FT KJD17-16F KJD17-16FT



Mounting Size 安装尺寸

KJD17F KJD17FT KJD17-16F KJD17-16FT



X1: value "t" with Rubber Gasket
X2: value "t" without Rubber Gasket

x1: 带橡胶垫时的t值
x2: 不带橡胶垫时的t值

X1	X2	Y
1~1.5	1.5~2.5	46 ^{+0.1} ₀
1.5~2.5	2.5~3.5	46.4 ^{+0.1} ₀








电磁开关

KJD17 KJD17-16 Electromagnetic Switch



Standard 标准	TUV (EN60947)	TUV (EN61058)				UL, CUL (UL508, E195428)		VDE, CE (DIN EN61058, VDE0630)
Type 型号	KJD17	KJD17		KJD17-16		KJD17, KJD17-16		KJD17
Rated Voltage 额定电压	250V~	120V~	250V~	120V~	250V~	120V~	220-240V~	250V~
Rated Current 额定电流	AC-1: 18A AC-3: 15A	10 (8) A 18 (16) A	10 (8) A 16 (12) A	16 (16) A	18 (16) A	16A 1 / 2HP	16A 2HP	10 (8) A
Coil Voltage 线圈电压	220 - 240V~ or 100 -120V~							
Rated Frequency 额定频率	50 / 60Hz							
Degree of Protection 防护等级	IP54 (EN60947) IP55 (EN61058)							
Number of Operating Cycles 操作循环次数	5E4							
Ambient Temperature 环境温度	T55, T85, T85 / 55							

Ordering Options 订货选项

Panel 面板	Function 功能	Coil Voltage/Frequency 线圈电压/频率	Marking on Button 按钮标识	Accessories 附件
P1 Frame Without Waterproof Cover 不带防水罩框 	F1 Without Remote Trip 2NO 无小插片2NO  F2 With Remote Trip 2NO 带小插片2NO  F3 With Remote Trip NO+NC 带小插片NO+NC  F4 Without Remote Trip NO+NC 无小插片NO+NC  Note: Function F3, F4 only Suitable for Panel P2, P3 注:功能F3,F4仅适用于面板P2,P3	V1 110V 50Hz V2 120V 50/60Hz V3 220V - 240V 50/60Hz V4 230V 50Hz	M1  M2  M3  M4  M5  M6 	A1 Waterproof Cover 防水罩  A2 Rubber Sleeve 橡胶套  A3 Rubber Seal 橡胶垫 
P2 Black Frame 黑框 				
P3 Yellow Frame 黄框 